

product description: designed for distribution system with voltage 400 V and with maximum current 16 A  
 intended for devices of Tango - ABB series  
 suitable for installation double socket  
 on the sides of the box are marked inlets for the trunkings  
 to install on materials with fire classes E or F, use insulating pad

material: PVC  
 color: white / imitation pink birch / imitation dark oak / light brown  
 self-snuffing: yes, within 30 s  
 temperature resistance: -5 - +60 °C  
 flaming loop test: 850 °C  
 fire class for underlying material: A1-D  
 weight: 53 g  
 meets the requirements: EN 60 670-1  
 storage: ČSN 64 0090

LK 80X28 2ZT\_HB - 10 pcs of boxes including device screws packed in foil; 80 pcs of boxes in carton; color - white  
 LK 80X28 2ZT\_I1 - 10 pcs of boxes including device screws packed in foil; 80 pcs of boxes in carton; color - imitation pink birch  
 LK 80X28 2ZT\_I2 - 10 pcs of boxes including device screws packed in foil; 80 pcs of boxes in carton; color - imitation dark oak  
 LK 80X28 2ZT\_SD - 10 pcs of boxes including device screws packed in foil; 80 pcs of boxes in carton; color - light brown

accessories: screwless terminal plates TYP015, TYP016, TYP017, TYP018  
 extending frame NR 2ZT  
 thermo-insulating pad PI 80 2ZT  
 terminal plate S-66

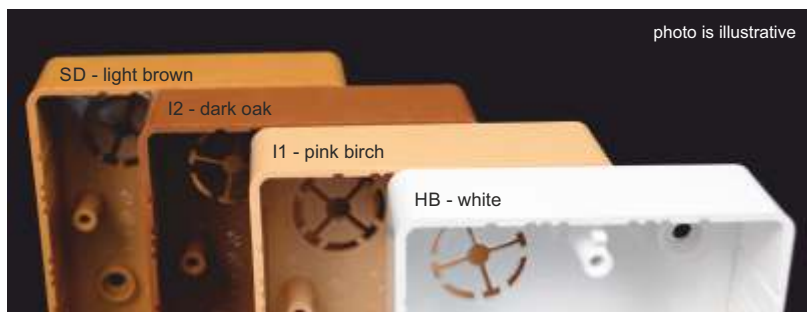


photo is illustrative